

C7L-2012-005

Area to be annexed for
limited purpose.

Approximately 327.482 Acres
out of the Santiago Del Valle
Grant, Abstract No. 24 in
Travis County, Texas.
(Unplatted Land)

LEGAL DESCRIPTION

LEGAL DESCRIPTION FOR A TRACT OF LAND
CONTAINING APPROXIMATELY 327.482 ACRES
OF LAND OUT OF THE SANTIAGO DEL VALLE
GRANT, ABSTRACT NO. 24 IN TRAVIS
COUNTY, TEXAS; OF WHICH APPROXIMATELY
327.482 ACRES OF LAND ARE TO BE TAKEN
INTO AND MADE A PART OF THE CITY OF
AUSTIN, SAID APPROXIMATELY 327.482
ACRES BEING MORE PARTICULARLY DESCRIBED
AS "DISTRICT FIVE" BY METES AND BOUNDS
IN EXHIBIT "A" ATTACHED HERETO:

Being all that certain tract of land called 327.482
acres as surveyed by Eric J. Dannheim, R.P.L.S. No. 6075,
State of Texas and signed September 17, 2010.

"This document was prepared under 22 TAC 663.21, does
not reflect the results of an on the ground survey, and is
not to be used to convey or establish interests in real
property except those rights and interests implied or
established by the creation or reconfiguration of the
boundary of the political subdivision for which it was
prepared".

LEGAL DESCRIPTION: Mary P. Hawkins

02-27-2012

Mary P. Hawkins 3/5/12

APPROVED: Mary P. Hawkins, RPLS NO. 4433
Quality and Standards Management Division
Department of Public Works
City of Austin

REFERENCES

TCAD MAP 3-4811
Austin Grid K-10, L-10, K-11 & L-11



**Professional Land Surveying, Inc.
Surveying and Mapping**

Office: 512-443-1724
Fax: 512-389-0943

3500 McCall Lane
Austin, Texas 78744

327.482 ACRES (DISTRICT FIVE)

**OVERALL 339.352 ACRES
SAVE AND EXCEPT 11.870 ACRES**

A DESCRIPTION OF 339.352 ACRES IN THE SANTIAGO DEL VALLE GRANT IN TRAVIS COUNTY, TEXAS, BEING A PORTION OF A 167.748 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED DECEMBER 13, 2006 AND RECORDED IN DOCUMENT NO. 2006241307 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 98.656 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED OCTOBER 19, 2006 AND RECORDED IN DOCUMENT NO. 2006204344 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 60.921 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED DECEMBER 12, 2006 AND RECORDED IN DOCUMENT NO. 2006239174 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 51.942 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED DECEMBER 1, 2006 AND RECORDED IN DOCUMENT NO. 2006233636 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 55.222 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060712 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 25.119 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060707 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 7.602 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060704 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 23.694 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060710 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 42.558 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED MAY 16, 2008 AND RECORDED IN DOCUMENT NO. 2008083861 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF LOT A, HARRY REININGER SUBDIVISION, A SUBDIVISION OF RECORD IN VOLUME 65, PAGE 47 OF THE PLAT RECORDS OF TRAVIS COUNTY TEXAS, CONVEYED TO JOHN HALDENSTEIN & RUTH HALDENSTEIN IN WARRANTY DEED WITH VENDOR'S LIEN DATED SEPTEMBER 29, 2000 AND RECORDED IN DOCUMENT NO. 2000161977 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY

TEXAS, AND A PORTION OF SASSMAN ROAD (RIGHT-OF-WAY WIDTH VARIES); SAID 339.352 ACRE TRACT BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING at a 1/2" rebar with Chaparral cap found in the west right-of-way line of F.M. 1625 (80' right-of-way width), for the southeast corner of said 167.748 acre tract, same being in the north right-of-way line of Sassman Road;

THENCE South 27°11'52" West, crossing Sassman Road with the west right-of-way line of F.M. 1625, a distance of 70.00 feet to a 1/2" rebar found in the south right-of-way line of Sassman Road, for the northeast corner of said 98.656 acre tract;

THENCE continuing with the west right-of-way line of F.M. 1625, same being the east line of said 98.656 acre tract, the following two (2) courses and distances:

1. South 27°11'52" West, a distance of 2856.46 feet to a concrete highway monument found 40 feet right of engineers' centerline station 115+77;
2. South 27°04'38" West, a distance of 352.96 feet to a calculated point;

THENCE crossing said 98.656 acre tract, said 60.921 acre tract, said 51.942 acre tract, said 55.222 acre tract, said 25.119 acre tract, said 7.602 acre tract, said 23.694 acre tract, Sassman Road, said Lot A, said 42.558 acre tract, and said 167.748 acre tract, the following fifteen (15) courses and distances:

1. North 62°55'22" West, a distance of 149.13 feet to a calculated point;
2. With a curve to the right, having a radius of 1800.01 feet, a delta angle of 68°24'29", an arc length of 2149.12 feet, and a chord which bears North 28°43'07" West, a distance of 2023.72 feet to a calculated point;
3. North 05°29'07" East, a distance of 423.15 feet to a calculated point;
4. With a curve to the left, having a radius of 1000.01 feet, a delta angle of 40°36'48", an arc length of 708.84 feet, and a chord which bears North 14°49'17" West, a distance of 694.09 feet to a calculated point;
5. North 35°07'41" West, a distance of 344.76 feet to a calculated point;
6. North 54°52'19" East, a distance of 25.40 feet to a calculated point;
7. With a curve to the left, having a radius of 500.00 feet, a delta angle of 96°25'47", an arc length of 841.51 feet, and a chord which bears North 06°39'26" East, a distance of 745.65 feet to a calculated point;
8. North 41°33'28" West, a distance of 274.95 feet to a calculated point;

9. With a curve to the right, having a radius of 580.00 feet, a delta angle of $69^{\circ}45'07''$, an arc length of 706.10 feet, and a chord which bears North $06^{\circ}40'54''$ West, a distance of 663.29 feet to a calculated point;
10. North $28^{\circ}11'39''$ East, a distance of 1597.96 feet to a calculated point;
11. South $61^{\circ}48'21''$ East, a distance of 1135.34 feet to a calculated point;
12. With a curve to the left, having a radius of 1399.96 feet, a delta angle of $31^{\circ}17'38''$, an arc length of 764.63 feet, and a chord which bears South $77^{\circ}27'10''$ East, a distance of 755.16 feet to a calculated point;
13. North $86^{\circ}54'01''$ East, a distance of 948.14 feet to a calculated point;
14. With a curve to the right, having a radius of 1399.96 feet, a delta angle of $30^{\circ}17'26''$, an arc length of 740.12 feet, and a chord which bears South $77^{\circ}57'16''$ East, a distance of 731.53 feet to a calculated point;
15. South $62^{\circ}48'33''$ East, a distance of 209.85 feet to a calculated point in the west right-of-way line of F.M. 1625, same being the east line of said 167.748 acre tract;

THENCE with the west right-of-way line of F.M. 1625, same being the east line of said 167.748 acre tract, the following two (2) courses and distances:

1. South $27^{\circ}05'45''$ West, a distance of 973.90 feet to a concrete highway monument found 40 feet right of engineers' centerline station 68+93.3;
2. South $27^{\circ}19'52''$ West, a distance of 601.74 feet to a 1/2" rebar with Chaparral cap found for the northeast corner of a 2.99 acre tract described in a deed to Thomas Edward McHenry and wife, Angela Jane McHenry, recorded in Document No. 2005117402 of the Official Public Records of Travis County, Texas;

THENCE continuing with the east line of said 167.748 acre tract, the following three (3) courses and distances:

1. North $62^{\circ}14'19''$ West, with the north line of said 2.99 acre tract, a distance of 361.02 feet to a 1/2" rebar found for the northwest corner of said 2.99 acre tract;
2. South $27^{\circ}25'52''$ West, with the west line of said 2.99 acre tract, a distance of 360.78 feet to a 1/2" rebar found for the southwest corner of said 2.99 acre tract;

3. South 62°14'19" East, with the south line of said 2.99 acre tract, a distance of 361.65 feet to a 1/2" rebar with Chaparral cap found in the west right-of-way line of F.M. 1625, for the southeast corner of said 2.99 acre tract;

THENCE with the west right-of-way line of F.M. 1625, same being the east line of said 167.748 acre tract, the following two (2) courses and distances:

1. South 27°19'52" West, a distance of 361.72 feet to a 1/2" rebar with Chaparral cap found 40 feet right of engineers' centerline station 82+17.1;
2. South 27°11'52" West, a distance of 434.71 feet to the **POINT OF BEGINNING**, containing 339.352 acres of land, more or less.

SAVE AND EXCEPT 2.495 ACRES:

BEING ALL OF LOT 1, J. P. COTMAN ADDITION, A SUBDIVISION OF RECORD IN VOLUME 79, PAGE 60 OF THE PLAT RECORDS OF TRAVIS COUNTY, TEXAS, CONVEYED TO JUAN YESCAS AND MARIA R. YESCAS IN A WARRANTY DEED, DATED DECEMBER 30, 2004 AND RECORDED IN DOCUMENT NO. 2004242191 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS; SAID 2.495 ACRE TRACT BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING at a 1" iron pipe found in the west right-of-way line of Sassman Road, for the southeast corner of said Lot 1, same being the east corner of said 7.602 acre tract;

THENCE North 63°13'21" West, with the south line of said Lot 1, same being the north line of said 7.602 acre tract, a distance of 543.90 feet to a 1/2" rebar found for the southwest corner of said Lot 1;

THENCE North 26°45'39" East, with the west line of said Lot 1, same being the east line of said 7.602 acre tract, a distance of 199.86 feet to a 1/2" rebar found for the northwest corner of said Lot 1, same being an angle point in the north line of said 7.602 acre tract, also being in the south line of said 23.694 acre tract;

THENCE South 63°13'21" East, with the north line of said Lot 1, same being the south line of said 23.694 acre tract, a distance of 543.89 feet to a 1/2" rebar with Chaparral cap found in the west right-of-way line of Sassman Road, for the northeast corner of said Lot 1, same being the southeast corner of said 23.694 acre tract;

THENCE South 26°45'21" West, with the west right-of-way line of Sassman Road, same being the east line of said Lot 1, a distance of 199.86 feet to the **POINT OF BEGINNING**, containing 2.495 acres of land, more or less.

SAVE AND EXCEPT 2.496 ACRES:

BEING ALL OF A 2.50 ACRE TRACT DESCRIBED IN WARRANTY DEED TO MICHAEL L. APPEGATE AND HARMONY D. APPEGATE, DATED NOVEMBER 5, 2003 AND RECORDED IN DOCUMENT NO. 2003261512 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY TEXAS; SAID 2.496 ACRE TRACT BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING at a 1/2" rebar found in the north right-of-way line of Sassman Road, for the southeast corner of said 2.50 acre tract, same being an angle point in the south line of said 42.558 acre tract;

THENCE North 63°50'26" West, with the north right-of-way line of Sassman Road, same being the south line of said 2.50 acre tract, a distance of 363.50 feet to a calculated point for the southwest corner of said 2.50 acre tract, same being an angle point in the south line of said 42.558 acre tract;

THENCE with the common line of said 2.50 acre tract and said 42.558 acre tract, the following three (3) courses and distances:

1. North 26°08'47" East, a distance of 299.42 feet to a 1/2" rebar found for the northwest corner of said 2.50 acre tract;
2. South 63°51'04" East, a distance of 362.66 feet to a 1/2" rebar found for the northeast corner of said 2.50 acre tract;
3. South 25°59'08" West, a distance of 299.49 feet to the **POINT OF BEGINNING**, containing 2.496 acres of land, more or less.

SAVE AND EXCEPT 4.178 ACRES:

BEING ALL OF A 3.213 ACRE TRACT DESCRIBED IN A DEED WITH VENDOR'S LIEN TO MARIO RODRIGUEZ & EMMA RODRIGUEZ, DATED FEBRUARY 4, 1983 AND RECORDED IN VOLUME 7998, PAGE 656 OF THE DEED RECORDS OF TRAVIS COUNTY, TEXAS AND ALL OF A 1.00 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO MARIO RODRIGUEZ AND EMMA RODRIGUEZ, DATED MARCH 3, 2005 AND RECORDED IN DOCUMENT NO. 2005046336 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS; SAID 4.178 ACRE TRACT BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING at a 1/2" rebar found for the southeast corner of said 1.00 acre tract, same being an angle point in the west line of said 167.748 acre tract;

THENCE North 64°32'09" West, with the south line of said 1.00 acre tract, same being the west line of said 167.748 acre tract, a distance of 21.19 feet to a 1/2" rebar with Chaparral cap found for an angle point in the north right-of-way line of Sassman Road, the south line of said 1.00 acre tract, and the west line of said 167.748 acre tract;

THENCE with the north right-of-way line of Sassman Road, same being the south line of said 1.00 acre tract and the south line of said 3.213 acre tract, the following two (2) courses and distances:

1. North 55°52'30" West, a distance of 116.23 feet to a calculated point;
2. North 63°50'26" West, a distance of 281.73 feet to a 1/2" rebar found for the southwest corner of said 3.213 acre tract, same being an angle point in the south line of said 42.558 acre tract;

THENCE with the north line of said 3.213 acre tract, same being the south line of said 42.558 acre tract, the following two (2) courses and distances:

1. North 40°38'03" East, a distance of 528.79 feet to a 1/2" rebar found for the north corner of said 3.213 acre tract;
2. South 61°13'19" East, a distance of 295.41 feet to a calculated point for the east corner of said 3.213 acre tract, same being the southeast corner of said 42.558 acre tract, also being in the west line of said 167.748 acre tract;

THENCE South 27°11'24" West, with the west line of said 167.748 acre tract, same being the east line of said 3.213 acre tract and the east line of said 1.00 acre tract, a distance of 514.44 feet to the **POINT OF BEGINNING**, containing 4.178 acres of land, more or less.

SAVE AND EXCEPT 2.701 ACRES:

BEING ALL OF A 2.701 ACRE TRACT DESCRIBED IN A WARRANTY DEED TO ABACU P. PEREZ, DATED MARCH 19, 2009 AND RECORDED IN DOCUMENT NO. 2009046965 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS; SAID 2.701 ACRE TRACT BEING MORE PARTICULARLY DESCRIBED BY METES AND BOUNDS AS FOLLOWS:

BEGINNING at a 1/2" rebar with Chaparral cap found in the south right-of-way line of Sassman Road, for the northeast corner of said 2.701 acre tract, same being the northwest corner of said 98.656 acre tract;

THENCE South 27°05'06" West, with the east line of said 2.701 acre tract, same being the west line of said 98.656 acre tract, a distance of 672.44 feet to a 1/2" rebar with Chaparral cap found for the southeast corner of said 2.701 acre tract, same being an angle point in the east line of said 51.942 acre tract;


THENCE with the south and west lines of said 2.701 acre tract, same being the east line of said 51.942 acre tract, the following two (2) courses and distances:

1. North 62°16'38" West, a distance of 175.00 feet to a 1/2" rebar with Chaparral cap found for the southwest corner of said 2.701 acre tract;
2. North 27°05'06" East, a distance of 672.44 feet to a 1/2" rebar with Chaparral cap found in the south right-of-way line of Sassman Road, for the northwest corner of said 2.701 acre tract, same being the northeast corner of said 51.942 acre tract;

THENCE South 62°16'38" East, with the south right-of-way line of Sassman Road, same being the north line of said 2.701 acre tract, a distance of 175.00 feet to the **POINT OF BEGINNING**, containing 2.701 acres of land, more or less.

Based on surveys made on the ground by Chaparral from June 20, 2006 through November 15, 2007. Bearing Basis: Grid Azimuth for Texas Central Zone, 1983/93 HARN values from LCRA control network. Attachments: Drawing 500-001-BD-EX5.

This document was prepared under 22 TAC §663.21, does not reflect the results of an on the ground survey, and is not to be used to convey or establish interests in real property except those rights and interests implied or established by the creation or reconfiguration of the boundary of the political subdivision for which it was prepared.

 9/17/2010
Eric J. Dannheim
Registered Professional Land Surveyor
State of Texas No. 6075



SKETCH TO ACCOMPANY A DESCRIPTION OF 339.352 ACRES IN THE SANTIAGO DEL VALLE GRANT IN TRAVIS COUNTY, TEXAS, BEING A PORTION OF A 167.748 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED DECEMBER 13, 2006 AND RECORDED IN DOCUMENT NO. 2006241307 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 98.656 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED OCTOBER 19, 2006 AND RECORDED IN DOCUMENT NO. 2006204344 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 60.921 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED DECEMBER 12, 2006 AND RECORDED IN DOCUMENT NO. 2006239174 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 51.942 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED DECEMBER 1, 2006 AND RECORDED IN DOCUMENT NO. 2006233636 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 55.222 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060712 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 25.119 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060707 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 7.602 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060704 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 23.694 ACRE TRACT DESCRIBED IN A SPECIAL WARRANTY DEED TO JONA ACQUISITION INC., DATED APRIL 2, 2006 AND RECORDED IN DOCUMENT NO. 2007060710 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF A 42.558 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO JONA ACQUISITION INC., DATED MAY 16, 2008 AND RECORDED IN DOCUMENT NO. 2008083861 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, A PORTION OF LOT A, HARRY REININGER SUBDIVISION, A SUBDIVISION OF RECORD IN VOLUME 65, PAGE 47 OF THE PLAT RECORDS OF TRAVIS COUNTY TEXAS, CONVEYED TO JOHN HALDENSTEIN & RUTH HALDENSTEIN IN WARRANTY DEED WITH VENDOR'S LIEN DATED SEPTEMBER 29, 2000 AND RECORDED IN DOCUMENT NO. 2000161977 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY TEXAS, AND A PORTION OF SASSMAN ROAD (RIGHT-OF-WAY WIDTH VARIES).

SAVE AND EXCEPT:

2.495 ACRES, BEING ALL OF LOT 1, J. P. COTMAN ADDITION, A SUBDIVISION OF RECORD IN VOLUME 79, PAGE 60 OF THE PLAT RECORDS OF TRAVIS COUNTY, TEXAS, CONVEYED TO JUAN YESCAS AND MARIA R. YESCAS IN A WARRANTY DEED, DATED DECEMBER 30, 2004 AND RECORDED IN DOCUMENT NO. 2004242191 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, 2.496 ACRES, BEING ALL OF A 2.50 ACRE TRACT DESCRIBED IN WARRANTY DEED TO MICHAEL L. APPLGATE AND HARMONY D. APPLGATE, DATED NOVEMBER 5, 2003 AND RECORDED IN DOCUMENT NO. 2003261512 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY TEXAS, 4.178 ACRES, BEING ALL OF A 3.213 ACRE TRACT DESCRIBED IN A DEED WITH VENDOR'S LIEN TO MARIO RODRIGUEZ & EMMA RODRIGUEZ, DATED FEBRUARY 4, 1983 AND RECORDED IN VOLUME 7998, PAGE 656 OF THE DEED RECORDS OF TRAVIS COUNTY, TEXAS AND ALL OF A 1.00 ACRE TRACT DESCRIBED IN A GENERAL WARRANTY DEED TO MARIO RODRIGUEZ AND EMMA RODRIGUEZ, DATED MARCH 3, 2005 AND RECORDED IN DOCUMENT NO. 2005046336 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS, AND 2.701 ACRES, BEING ALL OF A 2.701 ACRE TRACT DESCRIBED IN A WARRANTY DEED TO ABACU P. PEREZ, DATED MARCH 19, 2009 AND RECORDED IN DOCUMENT NO. 2009046965 OF THE OFFICIAL PUBLIC RECORDS OF TRAVIS COUNTY, TEXAS.



DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 1 OF 8

BEARING BASIS: GRID AZIMUTH FOR TEXAS
CENTRAL ZONE, 1983/93 HARN VALUES
FROM LCRA CONTROL NETWORK.

ATTACHMENTS: METES AND BOUNDS
DESCRIPTION 500-001-BD-EX5

Chaparral

MAP SHEET INDEX
(NOT TO SCALE)

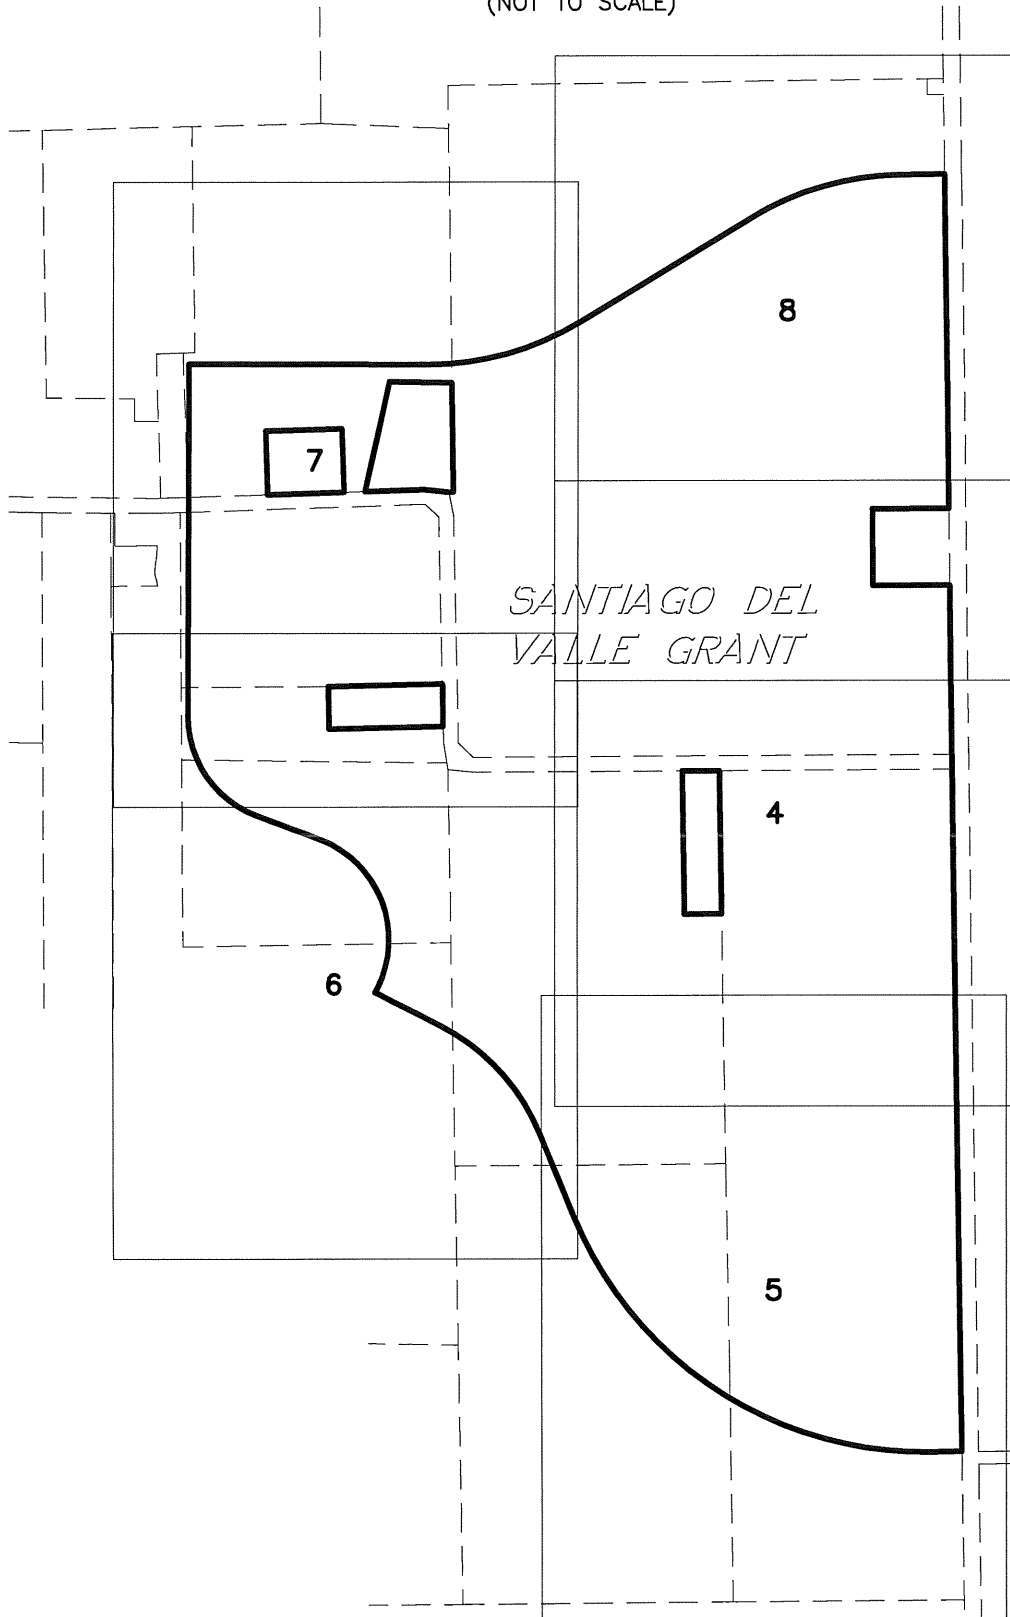

DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 2 OF 8

Chaparral

LEGEND

- 1/2" REBAR FOUND (UNLESS OTHERWISE NOTED)
- CHAP 1/2" REBAR WITH CHAPARRAL CAP FOUND
- ⊙ IRON PIPE FOUND (SIZE NOTED)
- CONCRETE HIGHWAY MONUMENT FOUND
- △ CALCULATED POINT

CURVE TABLE

NO.	DELTA	RADIUS	TAN	ARC	CHORD	BEARING
C1	68°24'29"	1800.01'	1223.47'	2149.12'	2023.72'	N28°43'07"W
C2	40°36'48"	1000.01'	370.05'	708.84'	694.09'	N14°49'17"W
C3	96°25'47"	500.00'	559.51'	841.51'	745.65'	N06°39'26"E
C4	69°45'07"	580.00'	404.25'	706.10'	663.29'	N06°40'54"W
C5	31°17'38"	1399.96'	392.11'	764.63'	755.16'	S77°27'10"E
C6	30°17'26"	1399.96'	378.93'	740.12'	731.53'	S77°57'16"E


THIS DOCUMENT WAS PREPARED UNDER 22 TAC §663.21, DOES NOT REFLECT THE RESULTS OF AN ON THE GROUND SURVEY, AND IS NOT TO BE USED TO CONVEY OR ESTABLISH INTERESTS IN REAL PROPERTY EXCEPT THOSE RIGHTS AND INTERESTS IMPLIED OR ESTABLISHED BY THE CREATION OR RECONFIGURATION OF THE BOUNDARY OF THE POLITICAL SUBDIVISION FOR WHICH IT WAS PREPARED.

LINE TABLE

No.	BEARING	LENGTH
L1	S27°11'52"W	70.00'
L2	N62°55'22"W	149.13'
L3	N54°52'19"E	25.40'
L4	S62°48'33"E	209.85'
L5	N64°32'09"W	21.19'
L6	N55°52'30"W	116.23'
L7	N63°50'26"W	281.73'
L8	N40°38'03"E	528.79'
L9	S61°13'19"E	295.41'
L10	S27°11'24"W	514.44'
L11	N63°50'26"W	363.50'
L12	N26°08'47"E	299.42'
L13	S63°51'04"E	362.66'
L14	S25°59'08"W	299.49'
L15	N63°13'21"W	543.90'
L16	N26°45'39"E	199.86'
L17	S63°13'21"E	543.89'
L18	S26°45'21"W	199.86'
L19	S27°05'06"W	672.44'
L20	N62°16'38"W	175.00'
L21	N27°05'06"E	672.44'
L22	S62°16'38"E	175.00'

DATE OF SURVEY: 11/15/2007
 PLOT DATE: 9/17/2010
 DRAWING NO.: 500-001-BD-EX5
 PROJECT NO.: 500-001
 DRAWN BY: EJD
 SHEET 3 OF 8


Chaparral



1"=300'

167.748 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006241307)

339.352
ACRES

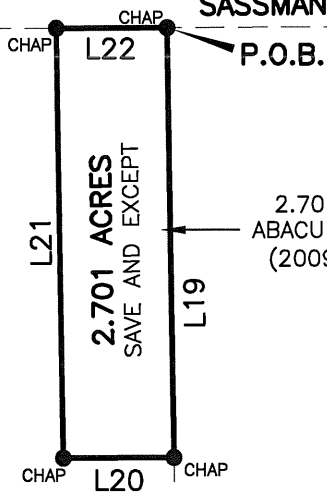

51.942 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006233636)


2.701 ACRES
ABACU P. PEREZ
(2009046965)

98.656 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006204344)

SANTIAGO DEL
VALLE GRANT

DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 4 OF 8

Chaparral

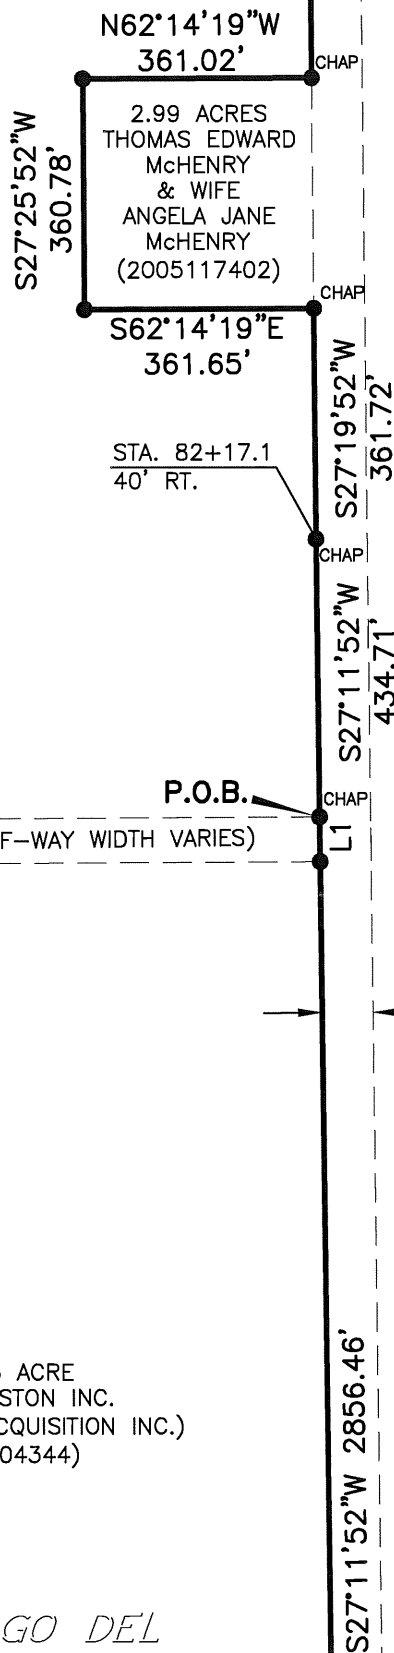

N62°14'19"W
361.02'

2.99 ACRES
THOMAS EDWARD
McHENRY
& WIFE
ANGELA JANE
McHENRY
(2005117402)

S62°14'19"E
361.65'


STA. 82+17.1
40' RT.

P.O.B.

SASSMAN ROAD (RIGHT-OF-WAY WIDTH VARIES)

F.M. 1625
(80' RIGHT-OF-WAY WIDTH)

51.942 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006233636)



1"=300'

339.352
ACRES

*SANTIAGO DEL
VALLE GRANT*

98.656 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006204344)

60.921 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006239174)

S27°29'07"E
15'

C1

STA. 115+77
40' RT.

S27°04'38"W
352.96'

L2

S27°11'

F.M. 1625 (80' RIGHT-OF-WAY WIDTH)

RODRIGUEZ ROAD
(RIGHT-OF-WAY WIDTH VARIES)

DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 5 OF 8

Chaparral

2.495 ACRES
SAVE AND EXCEPT

L17

CHAP

LOT 1


J. P. COTMAN ADDITION
(79/60)

L15

L18

P.O.B.

7.602 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2007060704)



1"=300'

339.352
ACRES

28.461 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006182621)

N41°33'28"W
274.95'

25.119 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2007060707)

51.942 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006233636)

55.222 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2007060712)

SANTIAGO DEL
VALLE GRANT

N35°07'41"W
344.76'


N05°29'07"E
423.15'

DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 6 OF 8

Chaparral

SANTIAGO DEL
VALLE GRANT

42.558 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2008083861)



1"=300'

LOT A
HARRY REININGER SUBDIVISION
(65/47)

S61°48'21"E 1135.34'



C5

2.496 ACRES
SAVE AND EXCEPT

4.178 ACRES
SAVE AND EXCEPT

3.213 ACRES
MARIO RODRIGUEZ &
EMMA RODRIGUEZ
(7998/656)

1.00 ACRE
MARIO &
EMMA RODRIGUEZ
(2005046336)



SASSMAN ROAD (RIGHT-OF-WAY WIDTH VARIES)

P.O.B.

CHAP
L6 L5 P.O.B.

N28°11'39"E 1597.96'


23.694 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2007060710)

167.748 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006241307)

2.495 ACRES
SAVE AND EXCEPT

339.352
ACRES


7.602 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2007060704)

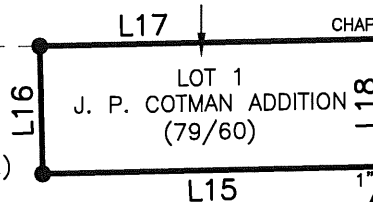

P.O.B.

DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 7 OF 8

Chaparral



1"=300'

N86°54'01"E 948.14'

C6

L4

SANTIAGO DEL
VALLE GRANT

167.748 ACRE
CARMA EASTON INC.
(F/K/A JONA ACQUISITION INC.)
(2006241307)



339.352
ACRES

EJD
9/17/2010

DATE OF SURVEY: 11/15/2007
PLOT DATE: 9/17/2010
DRAWING NO.: 500-001-BD-EX5
PROJECT NO.: 500-001
DRAWN BY: EJD
SHEET 8 OF 8

Chaparral

STA. 68+93.3
40' RT.

S27°05'45"W 973.90'

F.M. 1625
(80' RIGHT-OF-WAY WIDTH)

S27°19'52"W
601.74'

N62°14'19"W
361.02'

CHAP

S27°25'52"W
360.78'

2.99 ACRES
THOMAS EDWARD
McHENRY
& WIFE
ANGELA JANE
McHENRY
(2005117402)


CHAP

S62°14'19"E
361.65'

STA. 82+17.1
40' RT.

S27°19'52"W
361.72'

CHAP

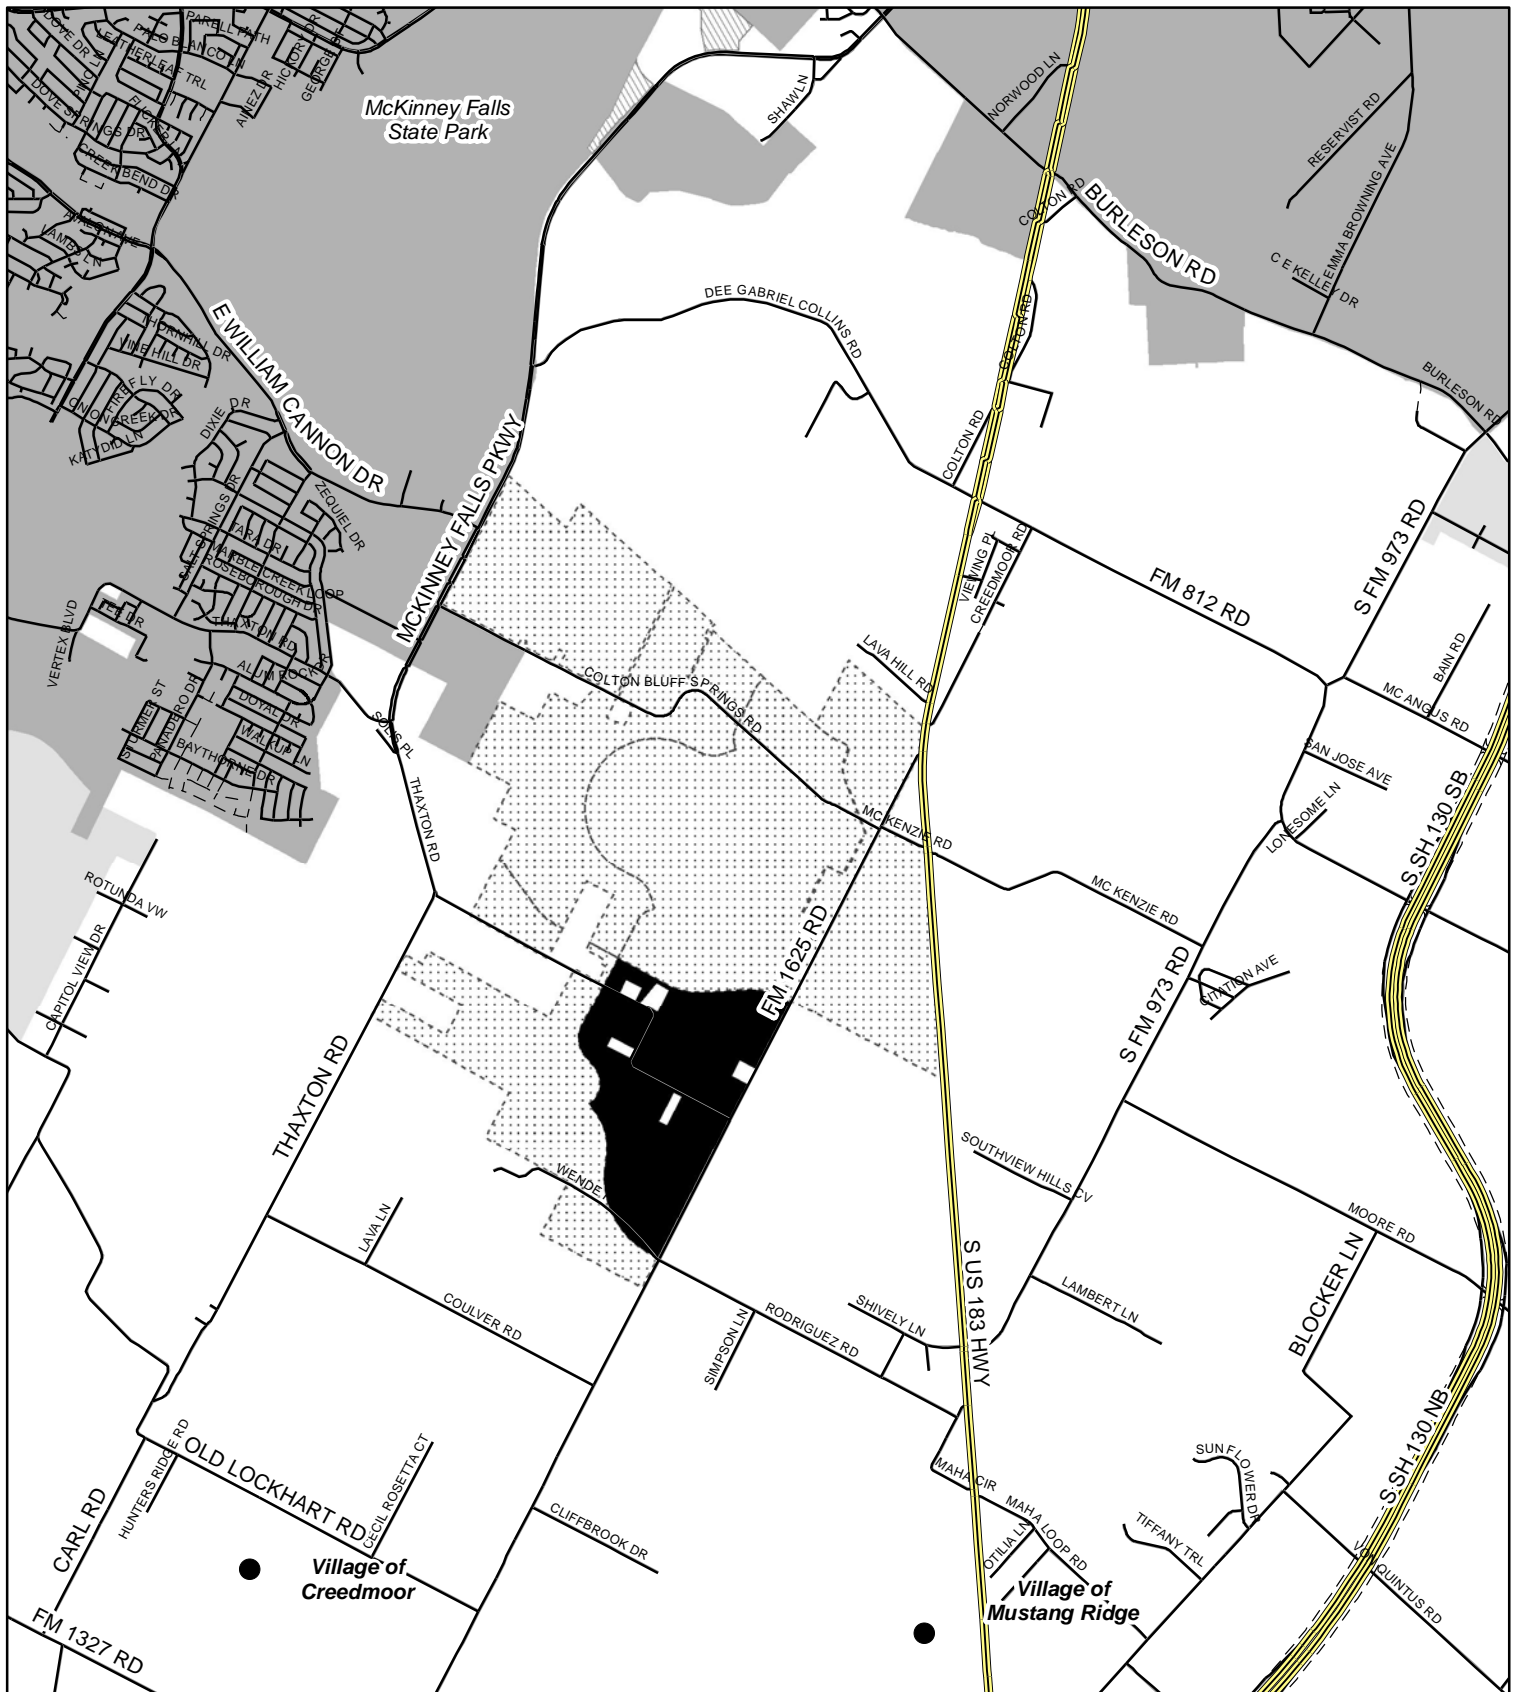

Pilot Knob Municipal Utility District No. 5 Annexation Area C7L-2012-0005



City of Austin PDRD
J. Chuter
March 26, 2012

LEGEND

- Annexation Area
- Other Pilot Knob MUDs
- County Line

CURRENT JURISDICTION

- Austin Full Purpose
- Austin Limited Purpose
- Austin ETJ - Agri Development Agreement
- Austin ETJ

- Highway
- Street - Built
- Street - Platted, Unbuilt

0 0.5 1 Miles



This product is for informational purposes and may not have been prepared for or be suitable for legal, engineering, or surveying purposes. It does not represent an on-the-ground survey and represents only the approximate relative location of property boundaries.

This product has been produced by the Planning and Development Review Department for the sole purpose of geographic reference. No warranty is made by the City of Austin regarding specific accuracy or completeness.

Sources: All data by COA unless otherwise provided.